



Load Restraint Requirements for Intermodal 11 coil loads

- ✓ Loaded to the headboard.
- ✓ 6 pairs of **alpha**-straps.
- ✓ 3 x **direct restraint** straps.
- ✓ Intermodal loads + 1 **direct restraint** through coil 6 pulling forwards.
- ✓ Triangular wooden chocks.

Equipment

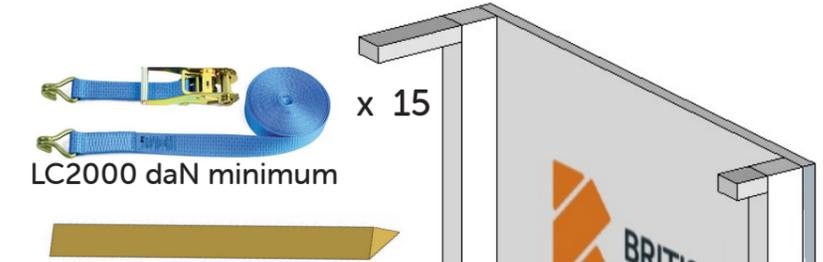


✓ Add 1 **direct restraint** pulling forwards on coil 6 for intermodal loads only.

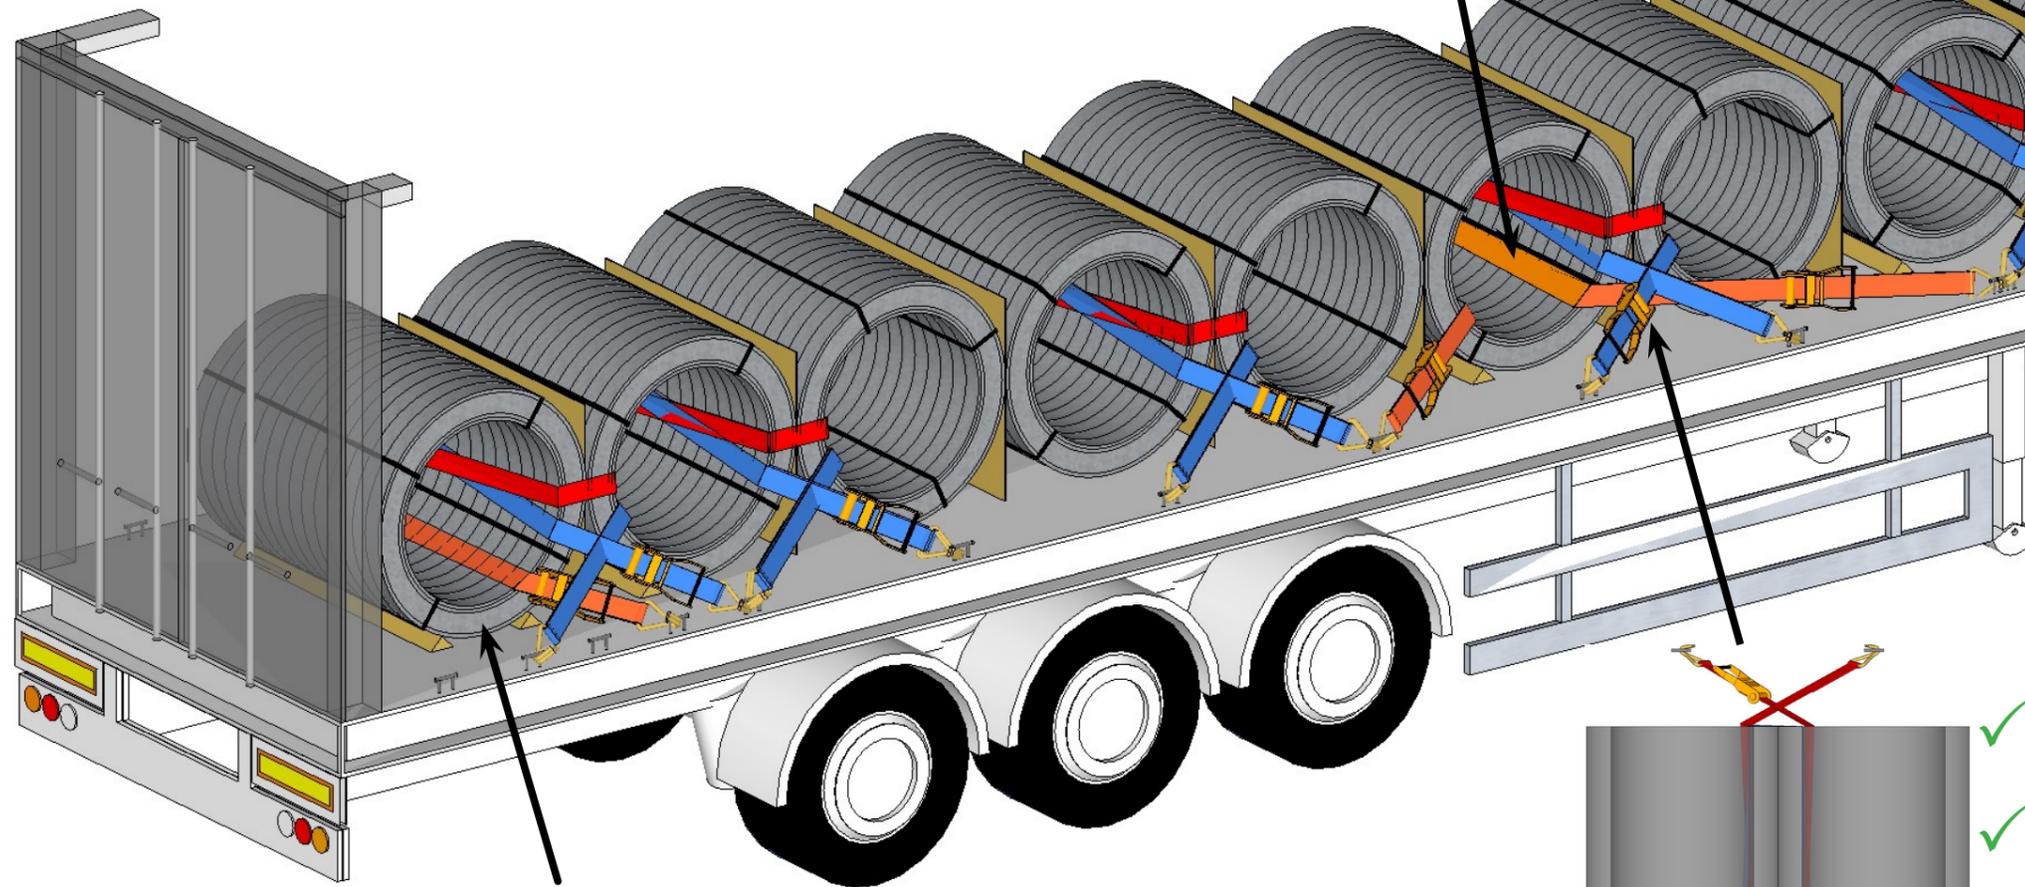

✓ All coils with a **direct lashing** through the bore must have a triangular chock placed beneath the coil.

✓ Rear coil with 2 **alpha**-strap restraints and 1 rear **direct restraint** pulling forwards.

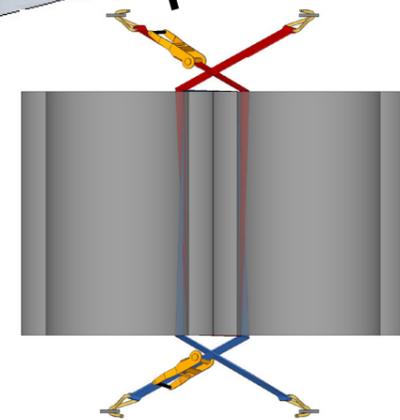

- ✓ Each pair of cross-loaded coils fitted with 2 **alpha**-straps.
- ✓ All coils with a **direct lashing** through the bore must have a triangular chock placed beneath the coil.



WRIC curtainsider ratchet positions for 11 coil Intermodal loads

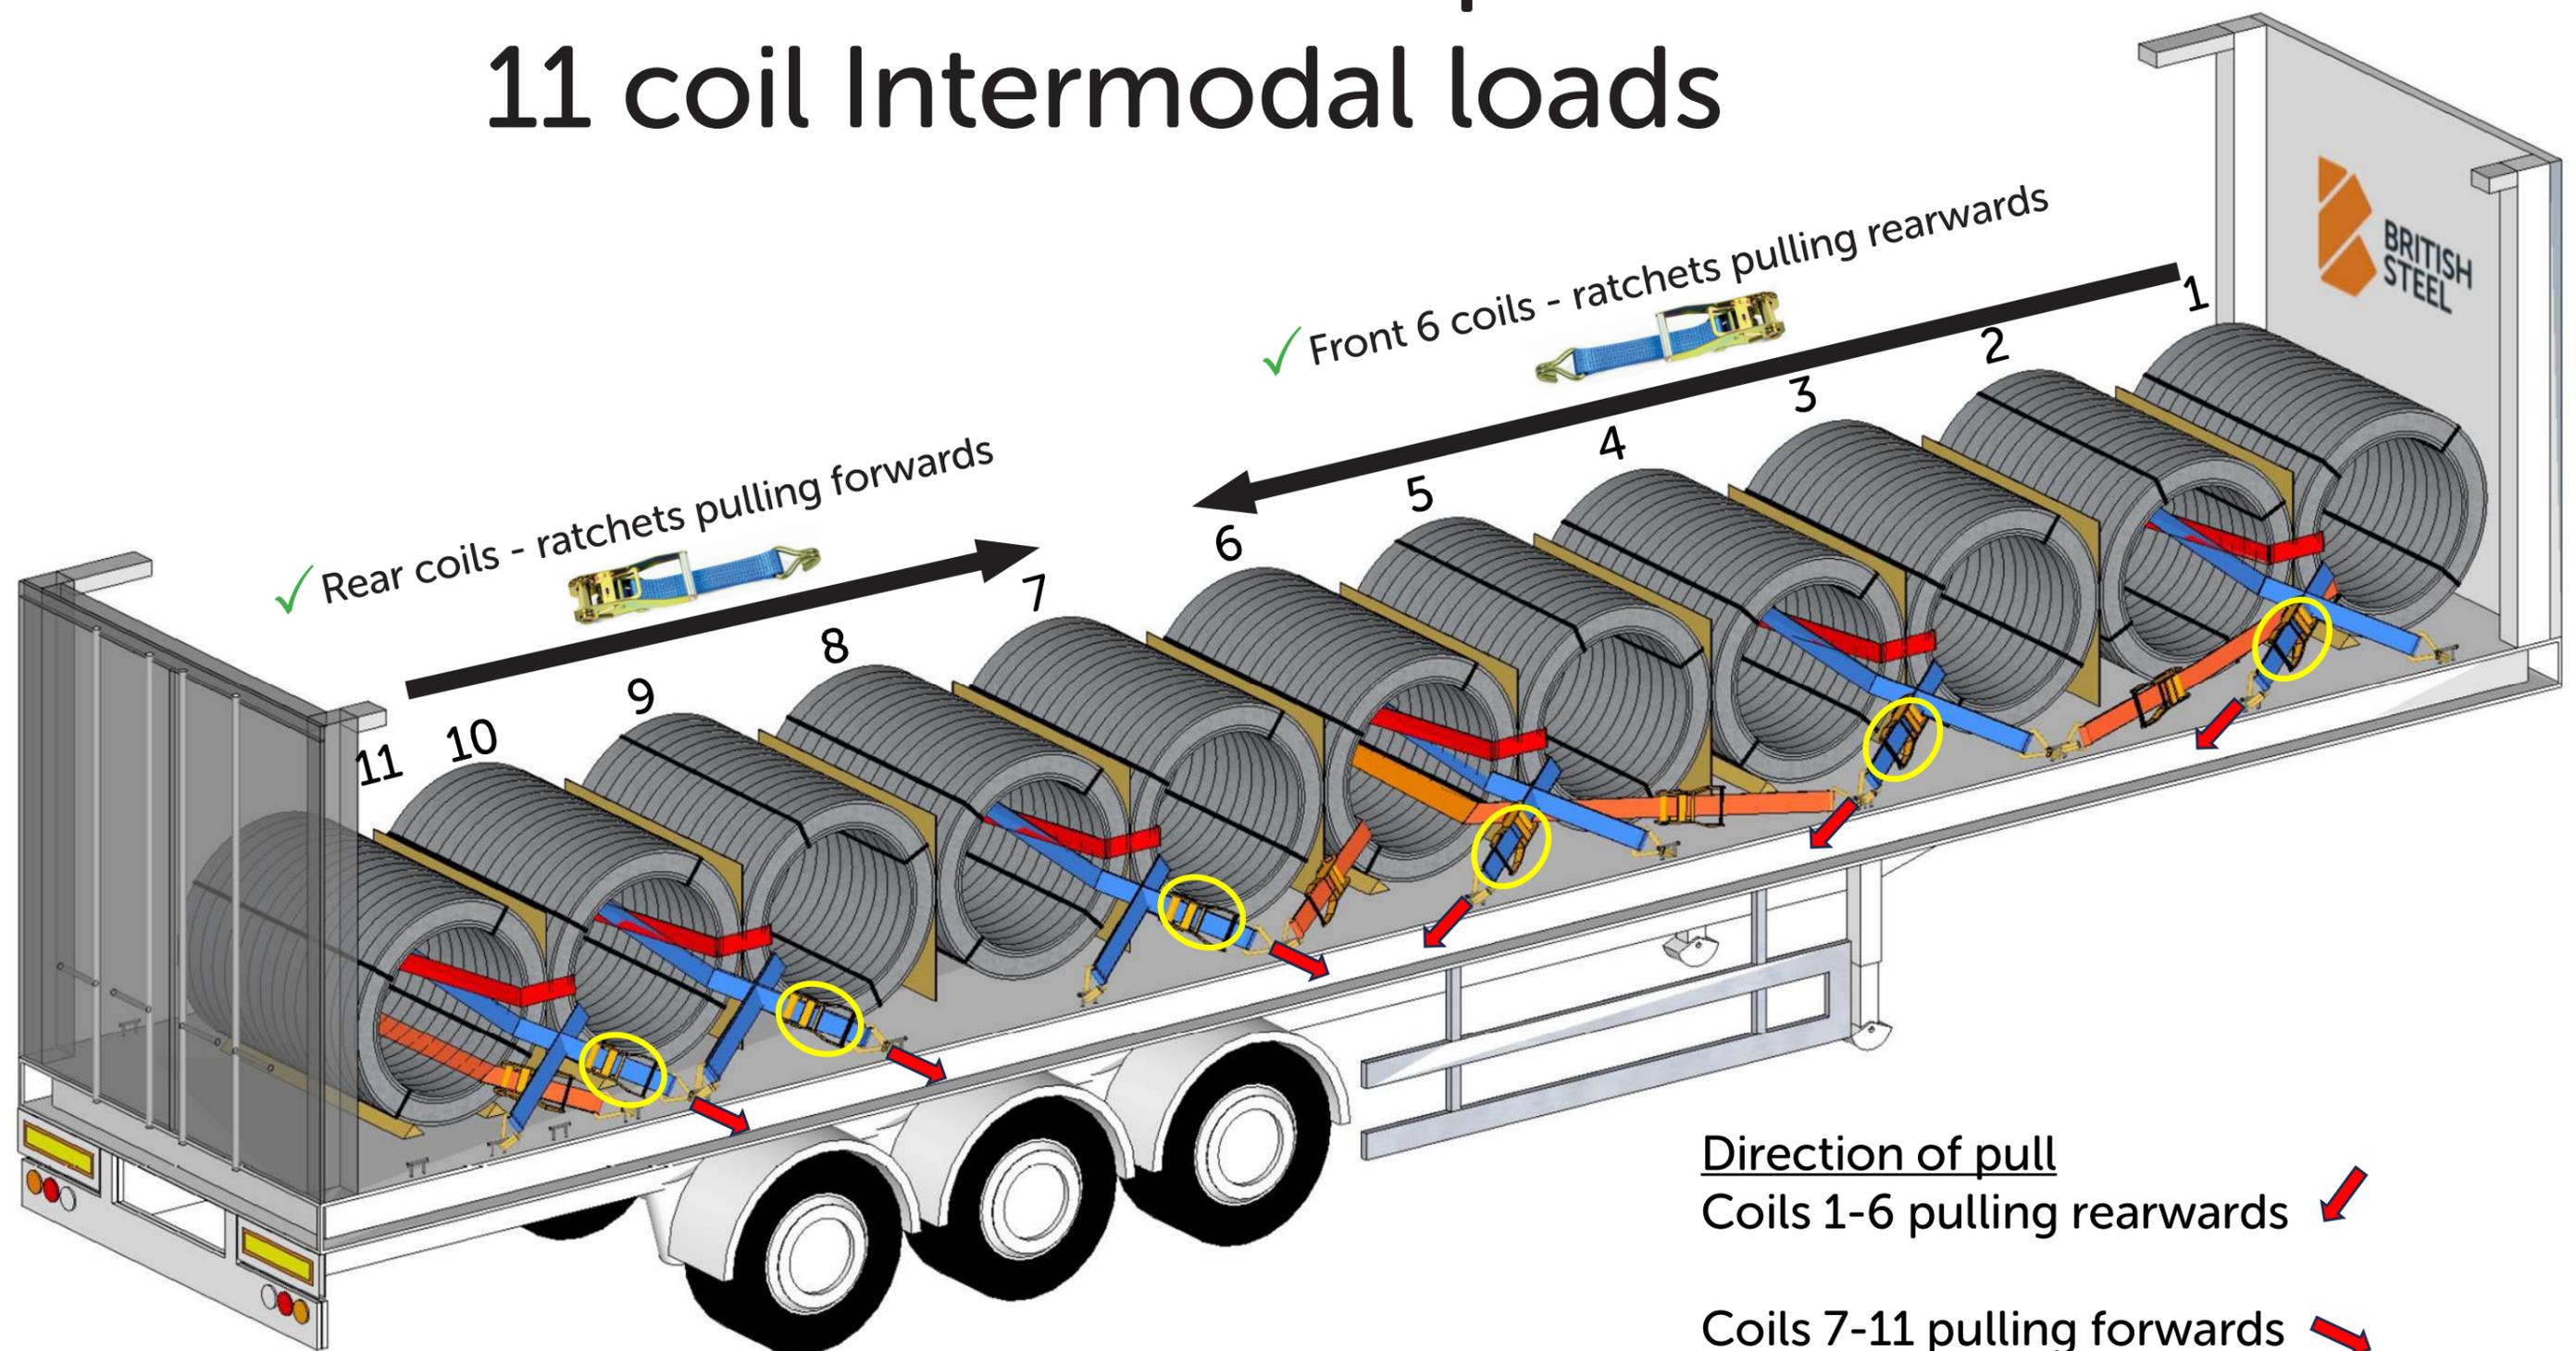


Image represents a standard curtainsider Intermodal load in standard weather conditions.

⚠ Warning: Unchoked coils may roll whilst loading and unloading. Use temporary chocks as necessary. ⚠

For further guidance see *LRG-0101 WRIC (Issue 1) 2023*

