




Load Restraint Requirements for UK and Export 11 coil loads


- ✓ Loaded to the headboard.
- ✓ 6 pairs of **alpha**-straps.
- ✓ 3 x **direct restraint** straps.
- ✓ Triangular wooden chocks.

Equipment

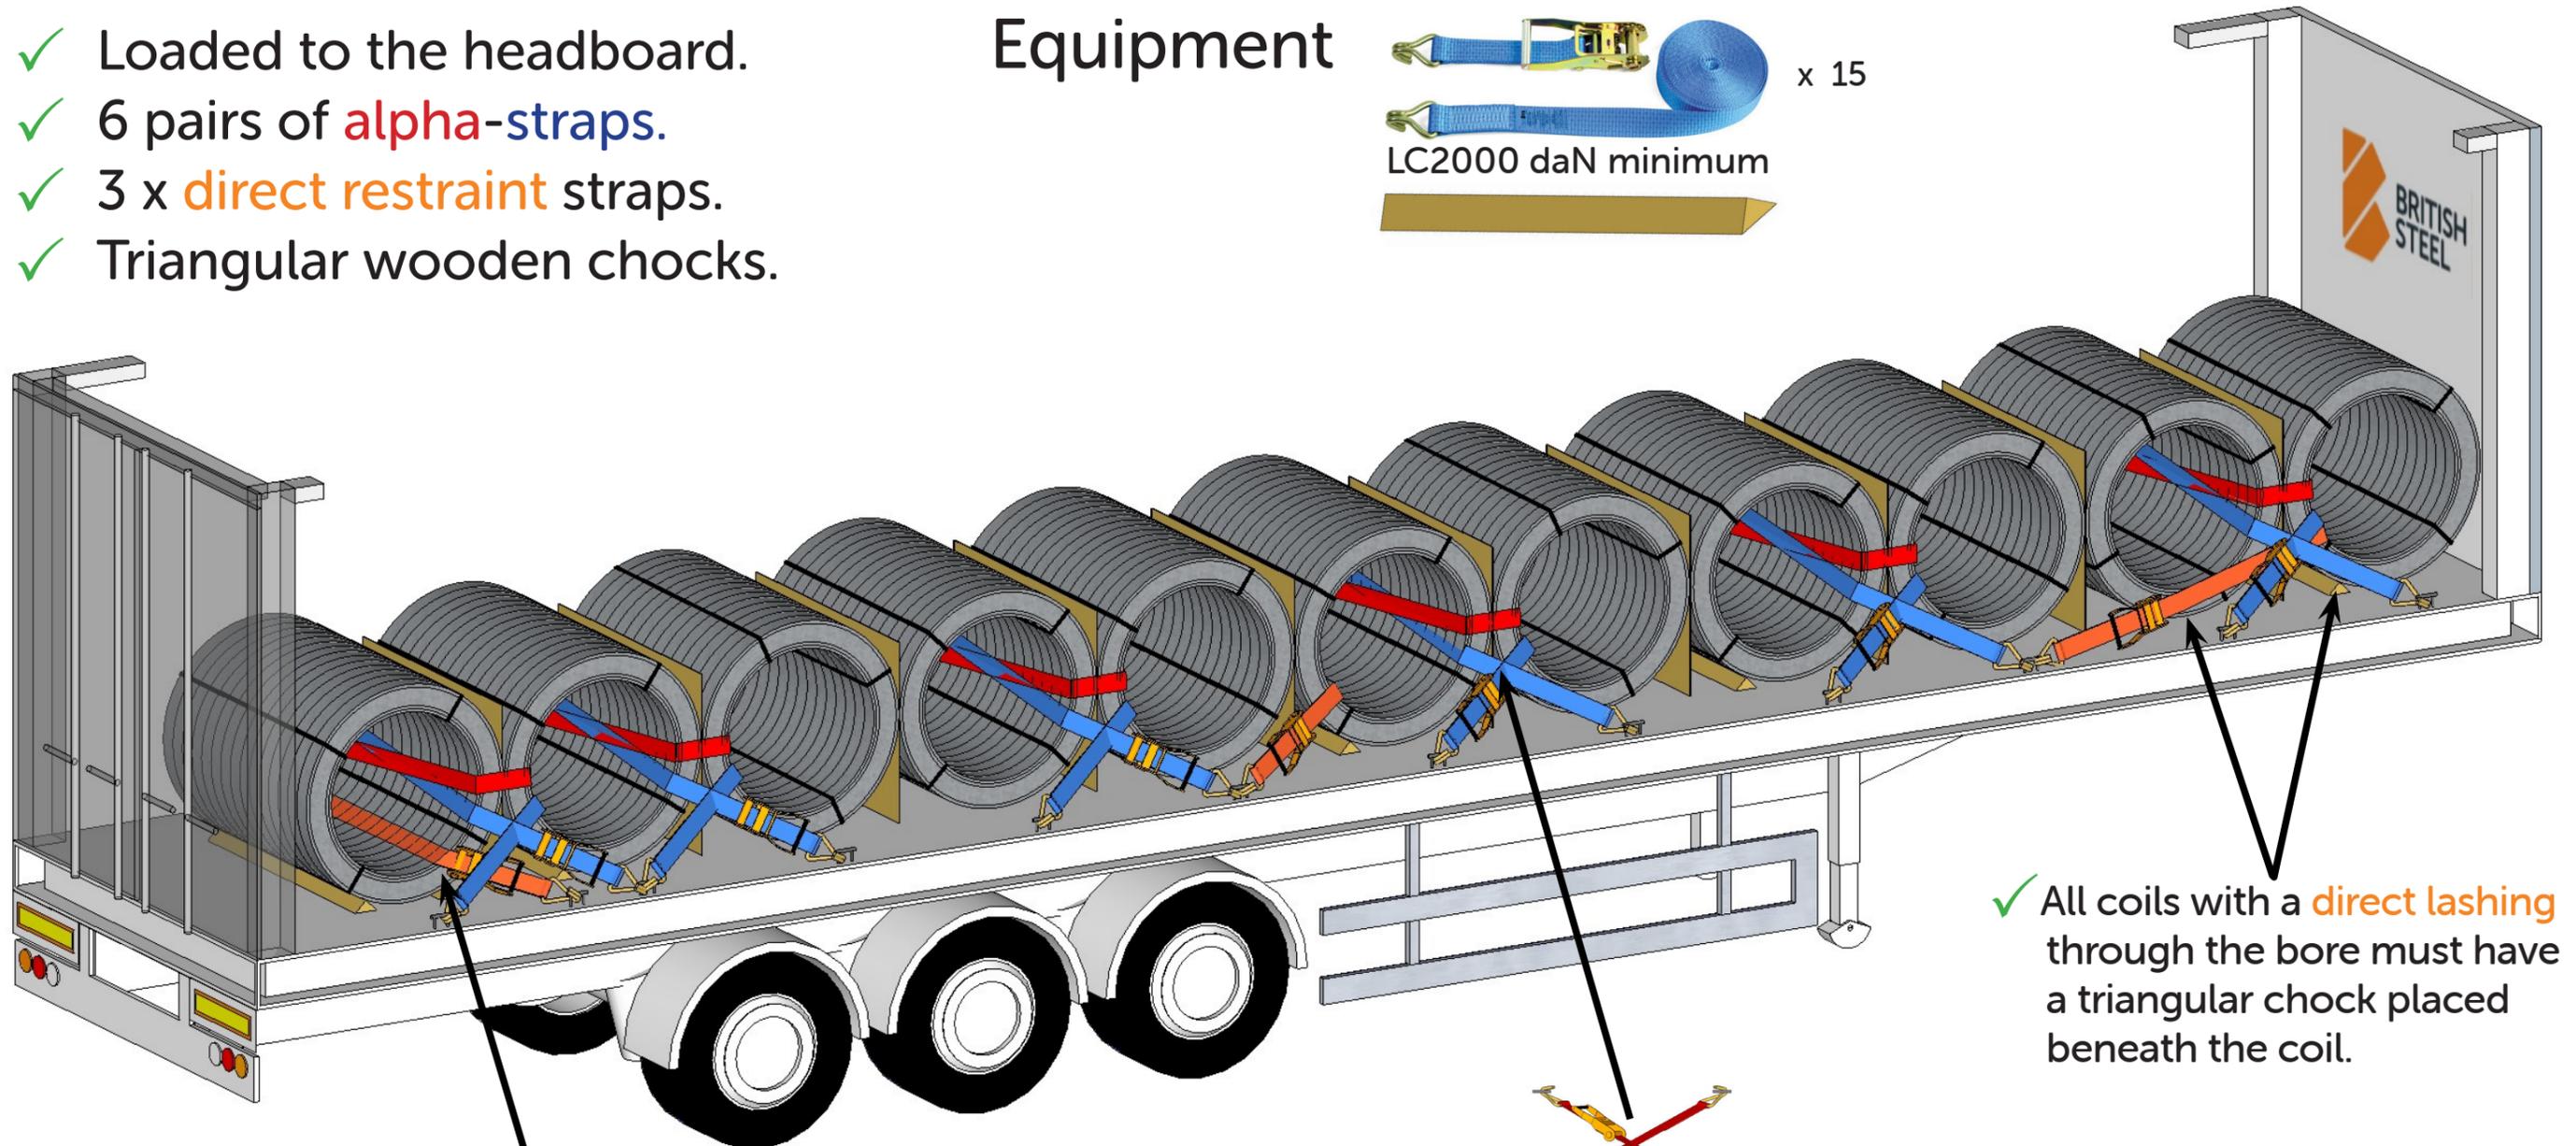


- ✓ Rear coil with 2 **alpha**-strap restraints and rear **direct restraint**.

- ✓ All coils with a **direct lashing** through the bore must have a triangular chock placed beneath the coil.

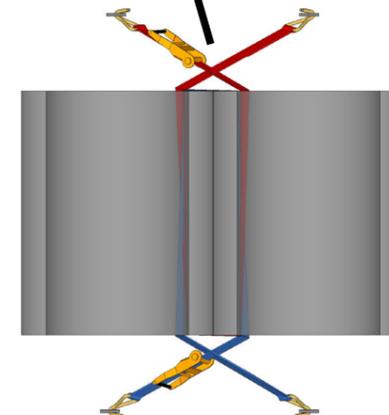

- ✓ Each pair of cross-loaded coils fitted with 2 **alpha**-straps.
- ✓ All coils with a **direct lashing** through the bore must have a triangular chock placed beneath the coil.

WRIC curtainsider ratchet positions for 11 coil loads

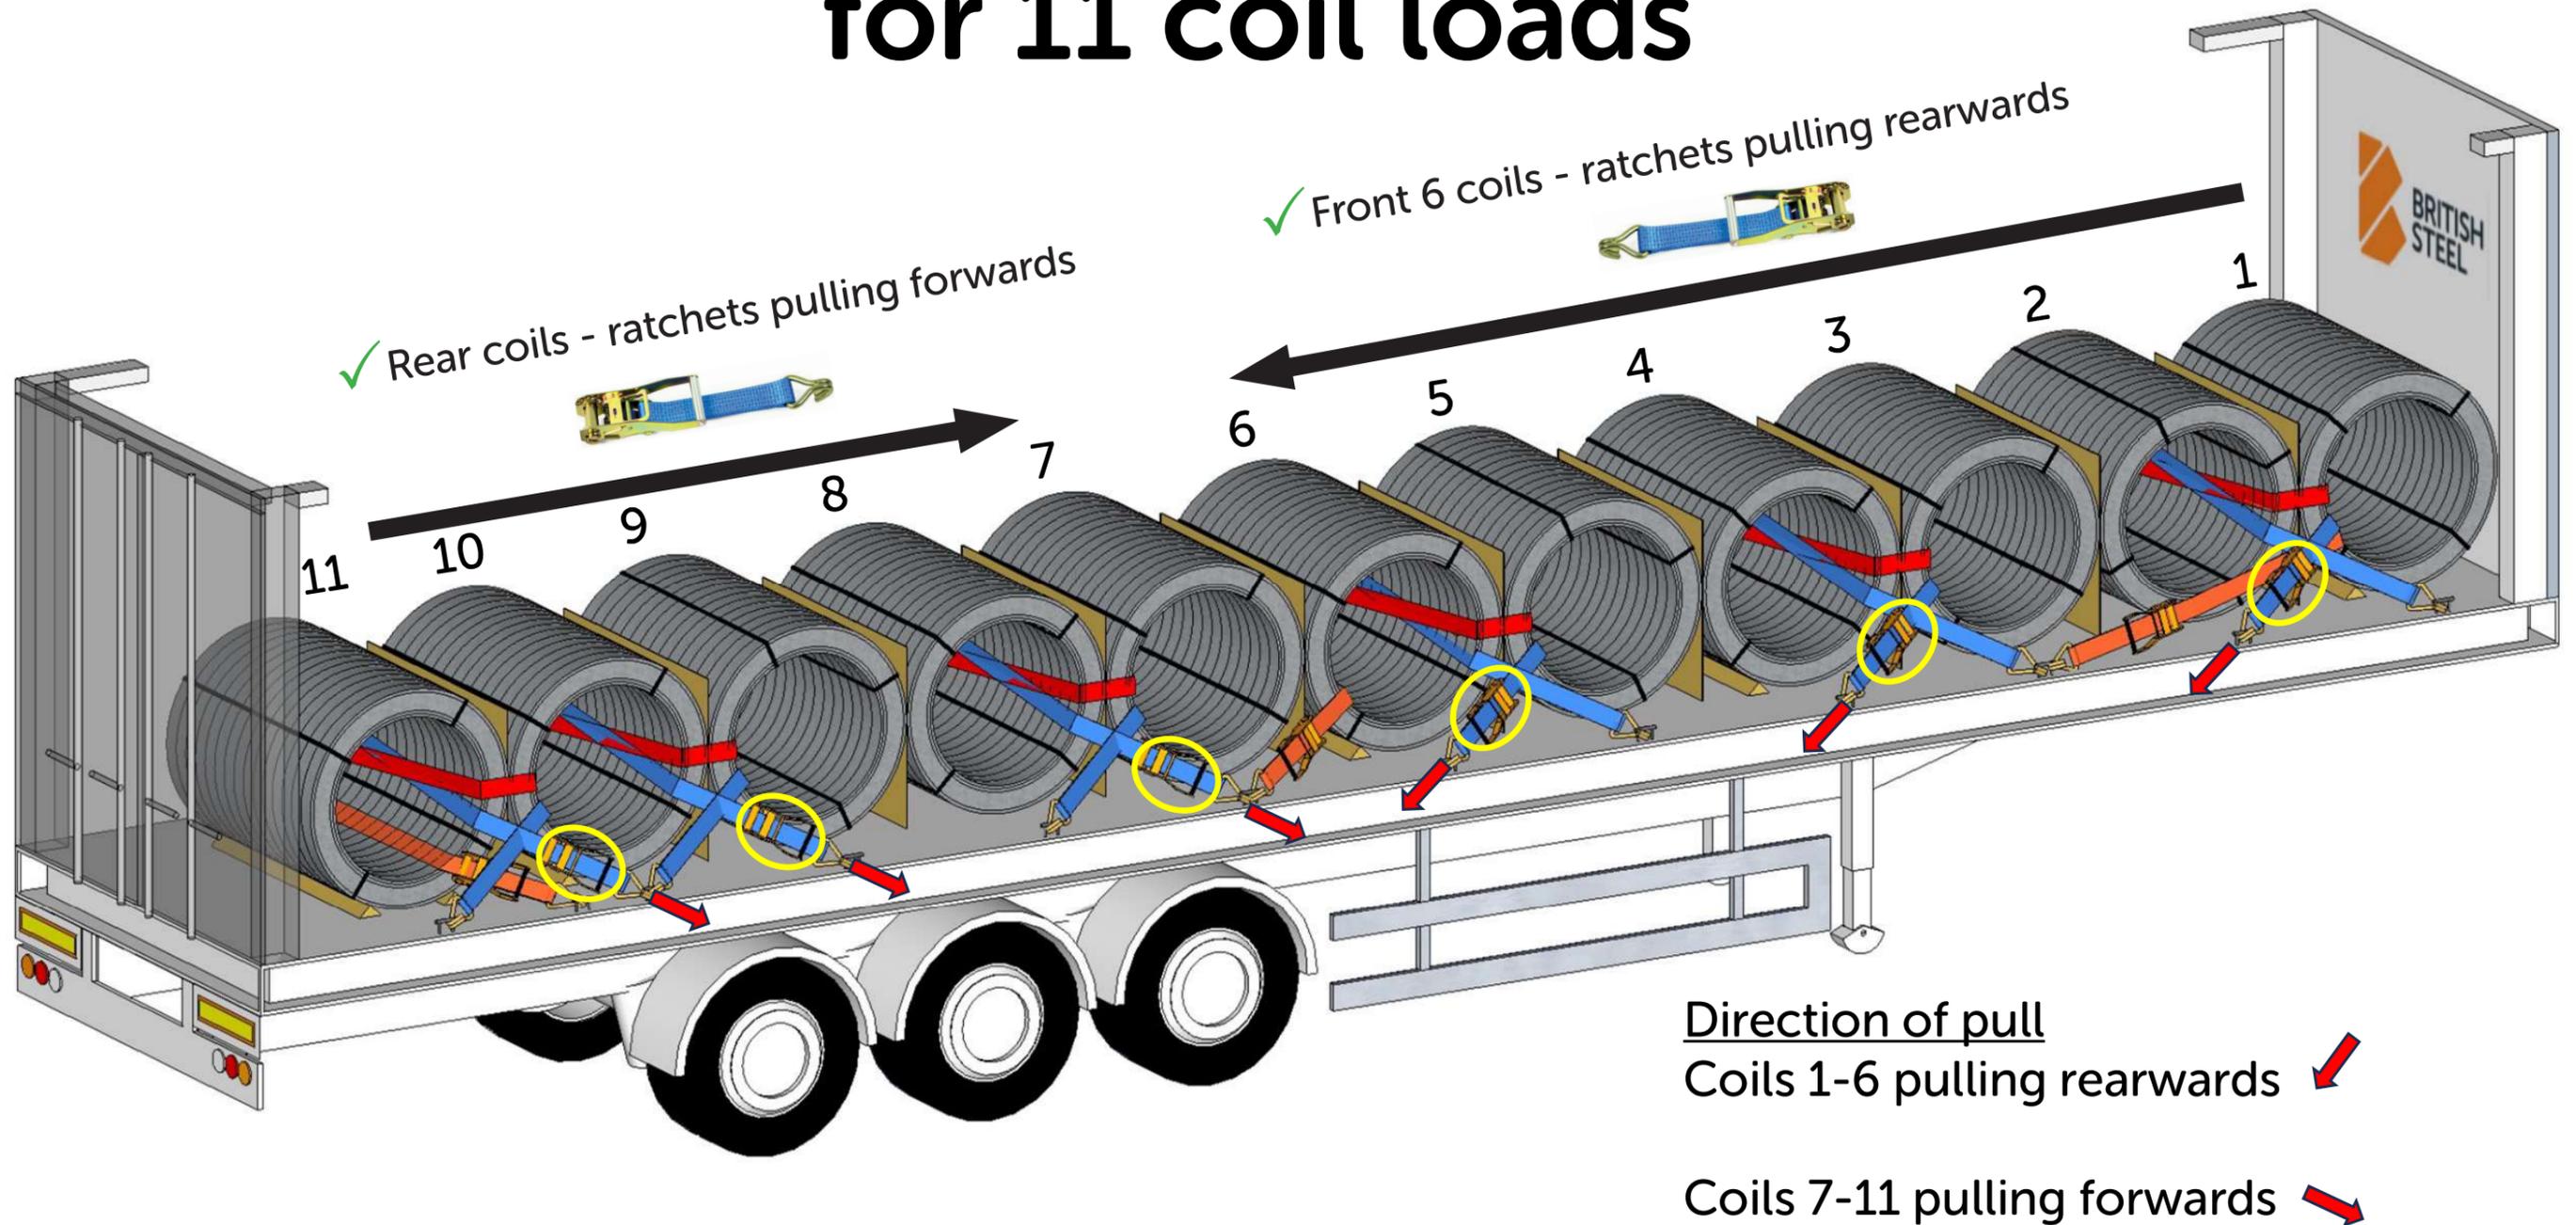

 Warning: Unchocked coils may roll whilst loading and unloading. Use temporary chocks as necessary. 

For further guidance see *LRG-0101 WRIC (Issue 1) 2023*

