



Load Restraint Requirements

- ✓ Loaded to the headboard.
- ✓ 5 pairs of **alpha**-straps.
- ✓ 2 x **over-the-top** straps.
- ✓ 3 x **direct restraint** straps.
- ✓ Triangular wooden chocks.


Equipment

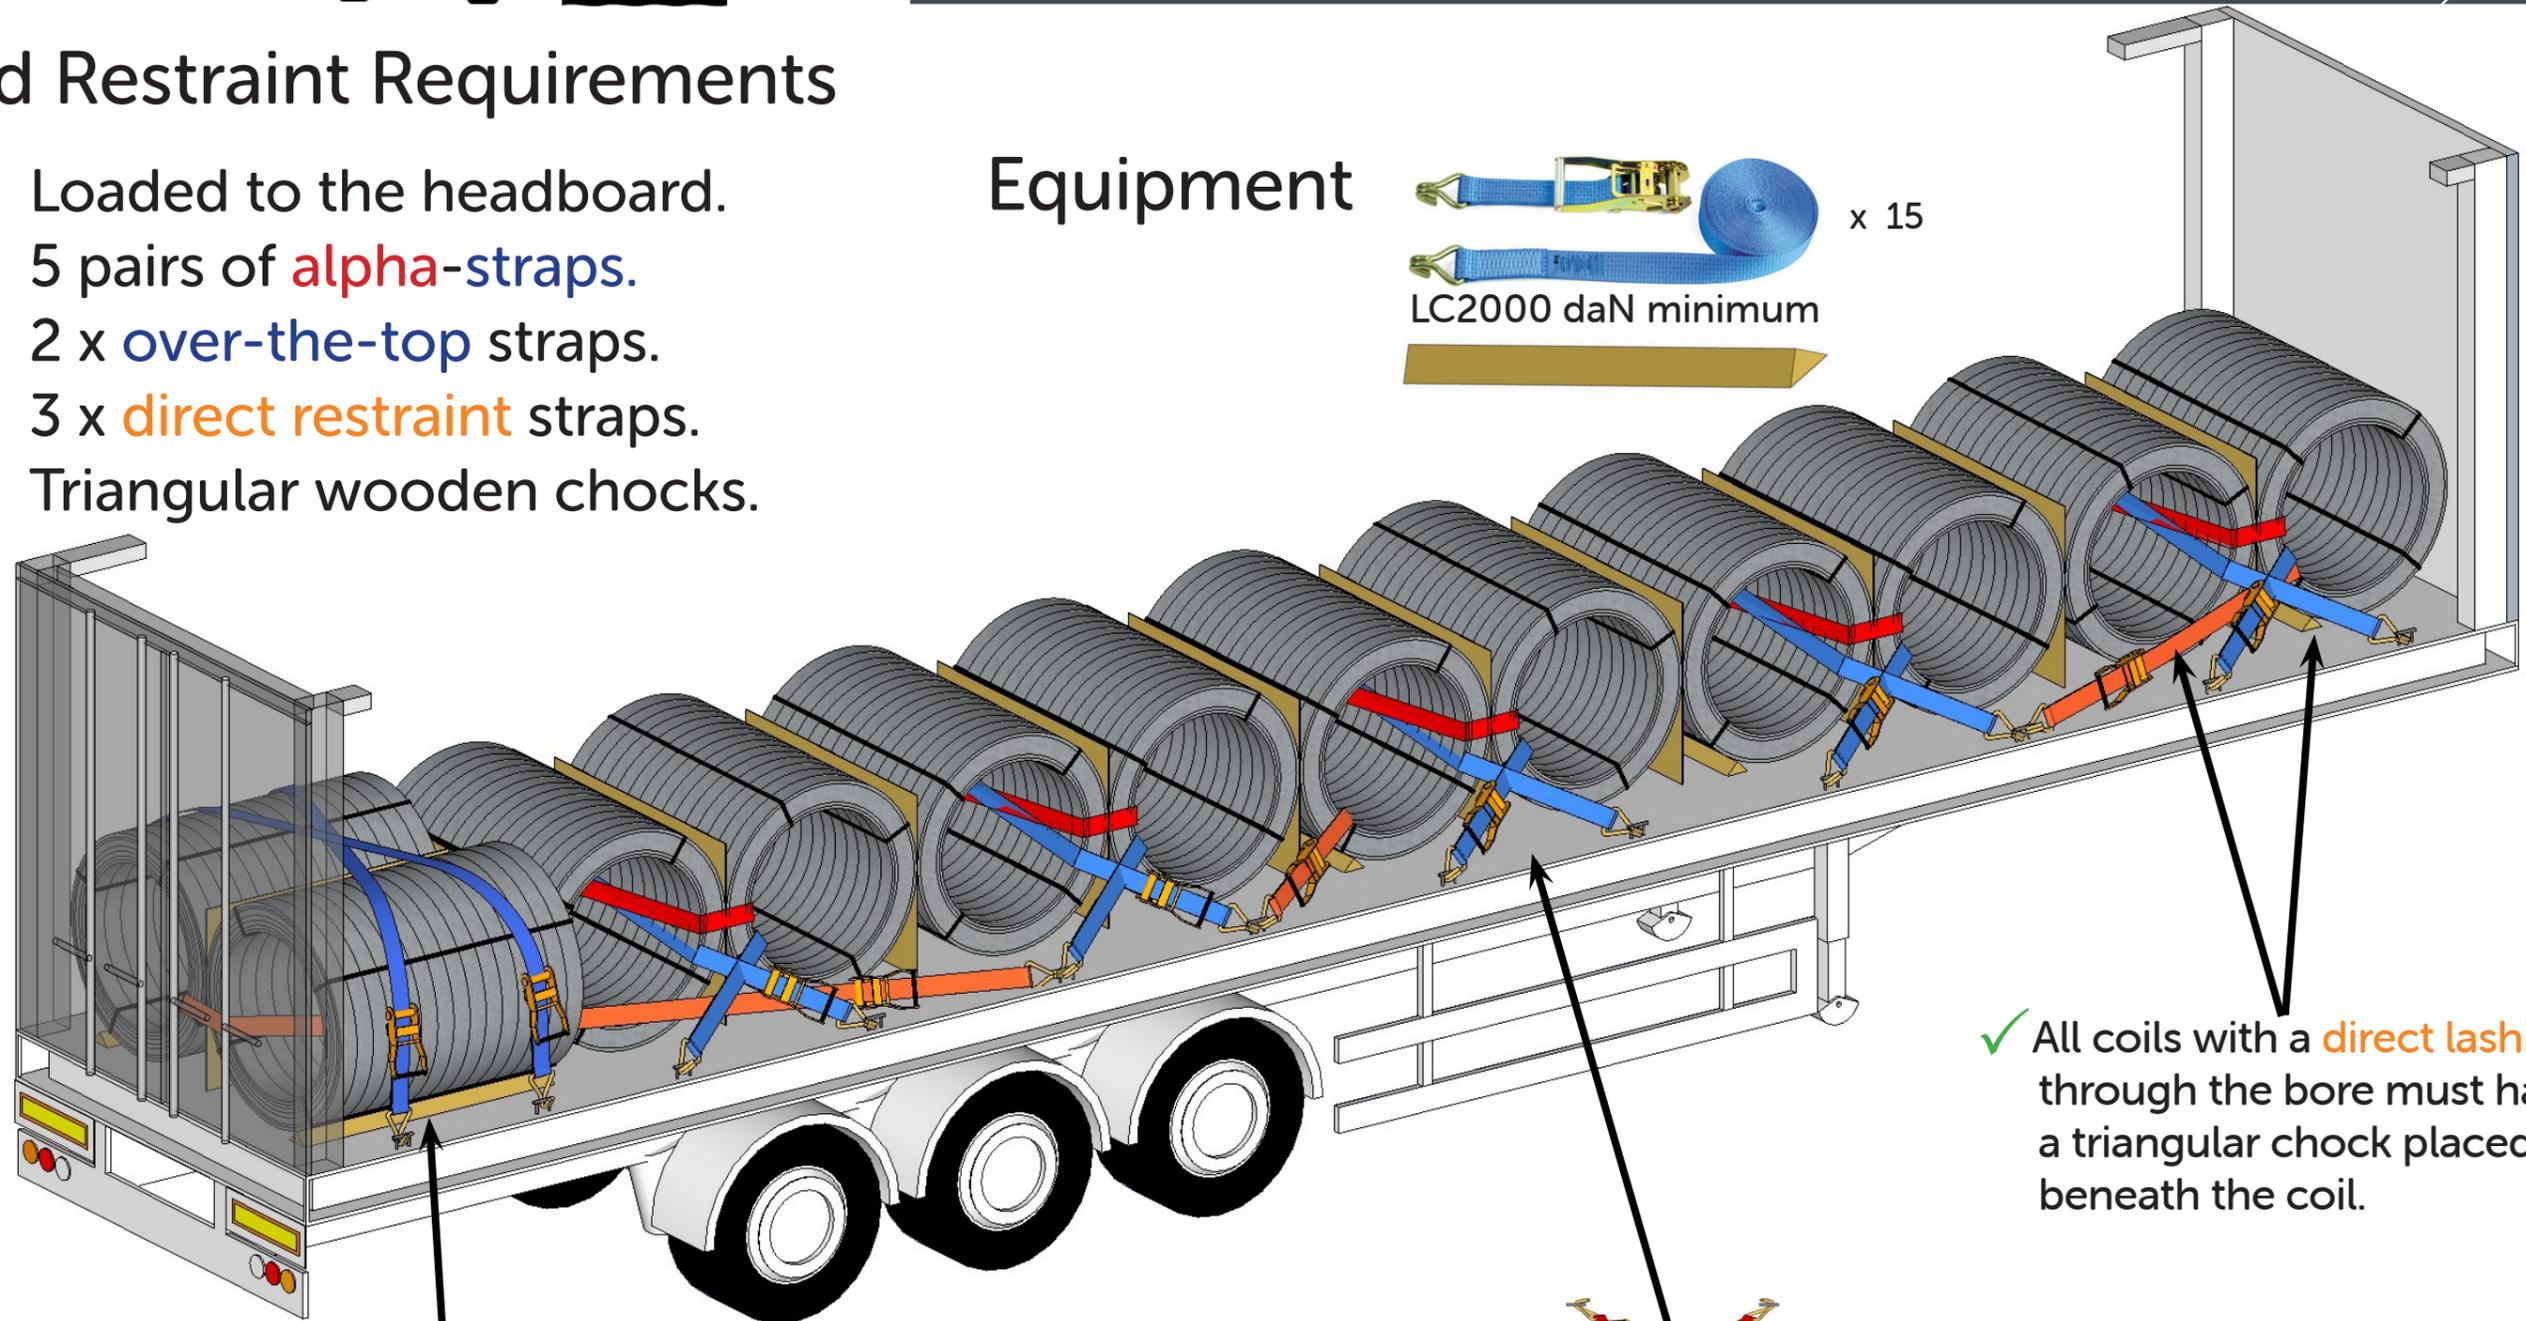

- ✓ All coils with a **direct lashing** through the bore must have a triangular chock placed beneath the coil.

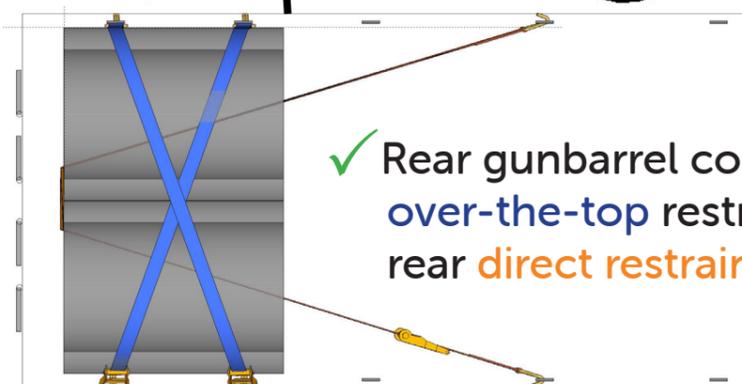


- ✓ Rear gunbarrel coils with **over-the-top** restraints and rear **direct restraint**.

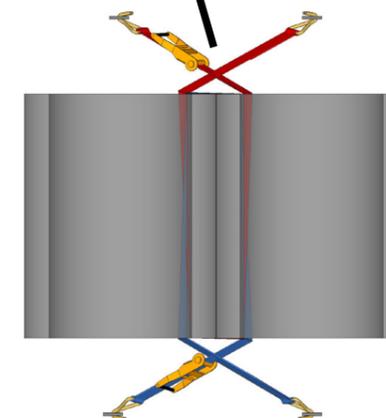

- ✓ Each pair of cross-loaded coils fitted with 2 **alpha**-straps.
- ✓ All coils with a **direct lashing** through the bore must have a triangular chock placed beneath the coil.

Curtainsider Loads - Ratchet positions and direction of pull

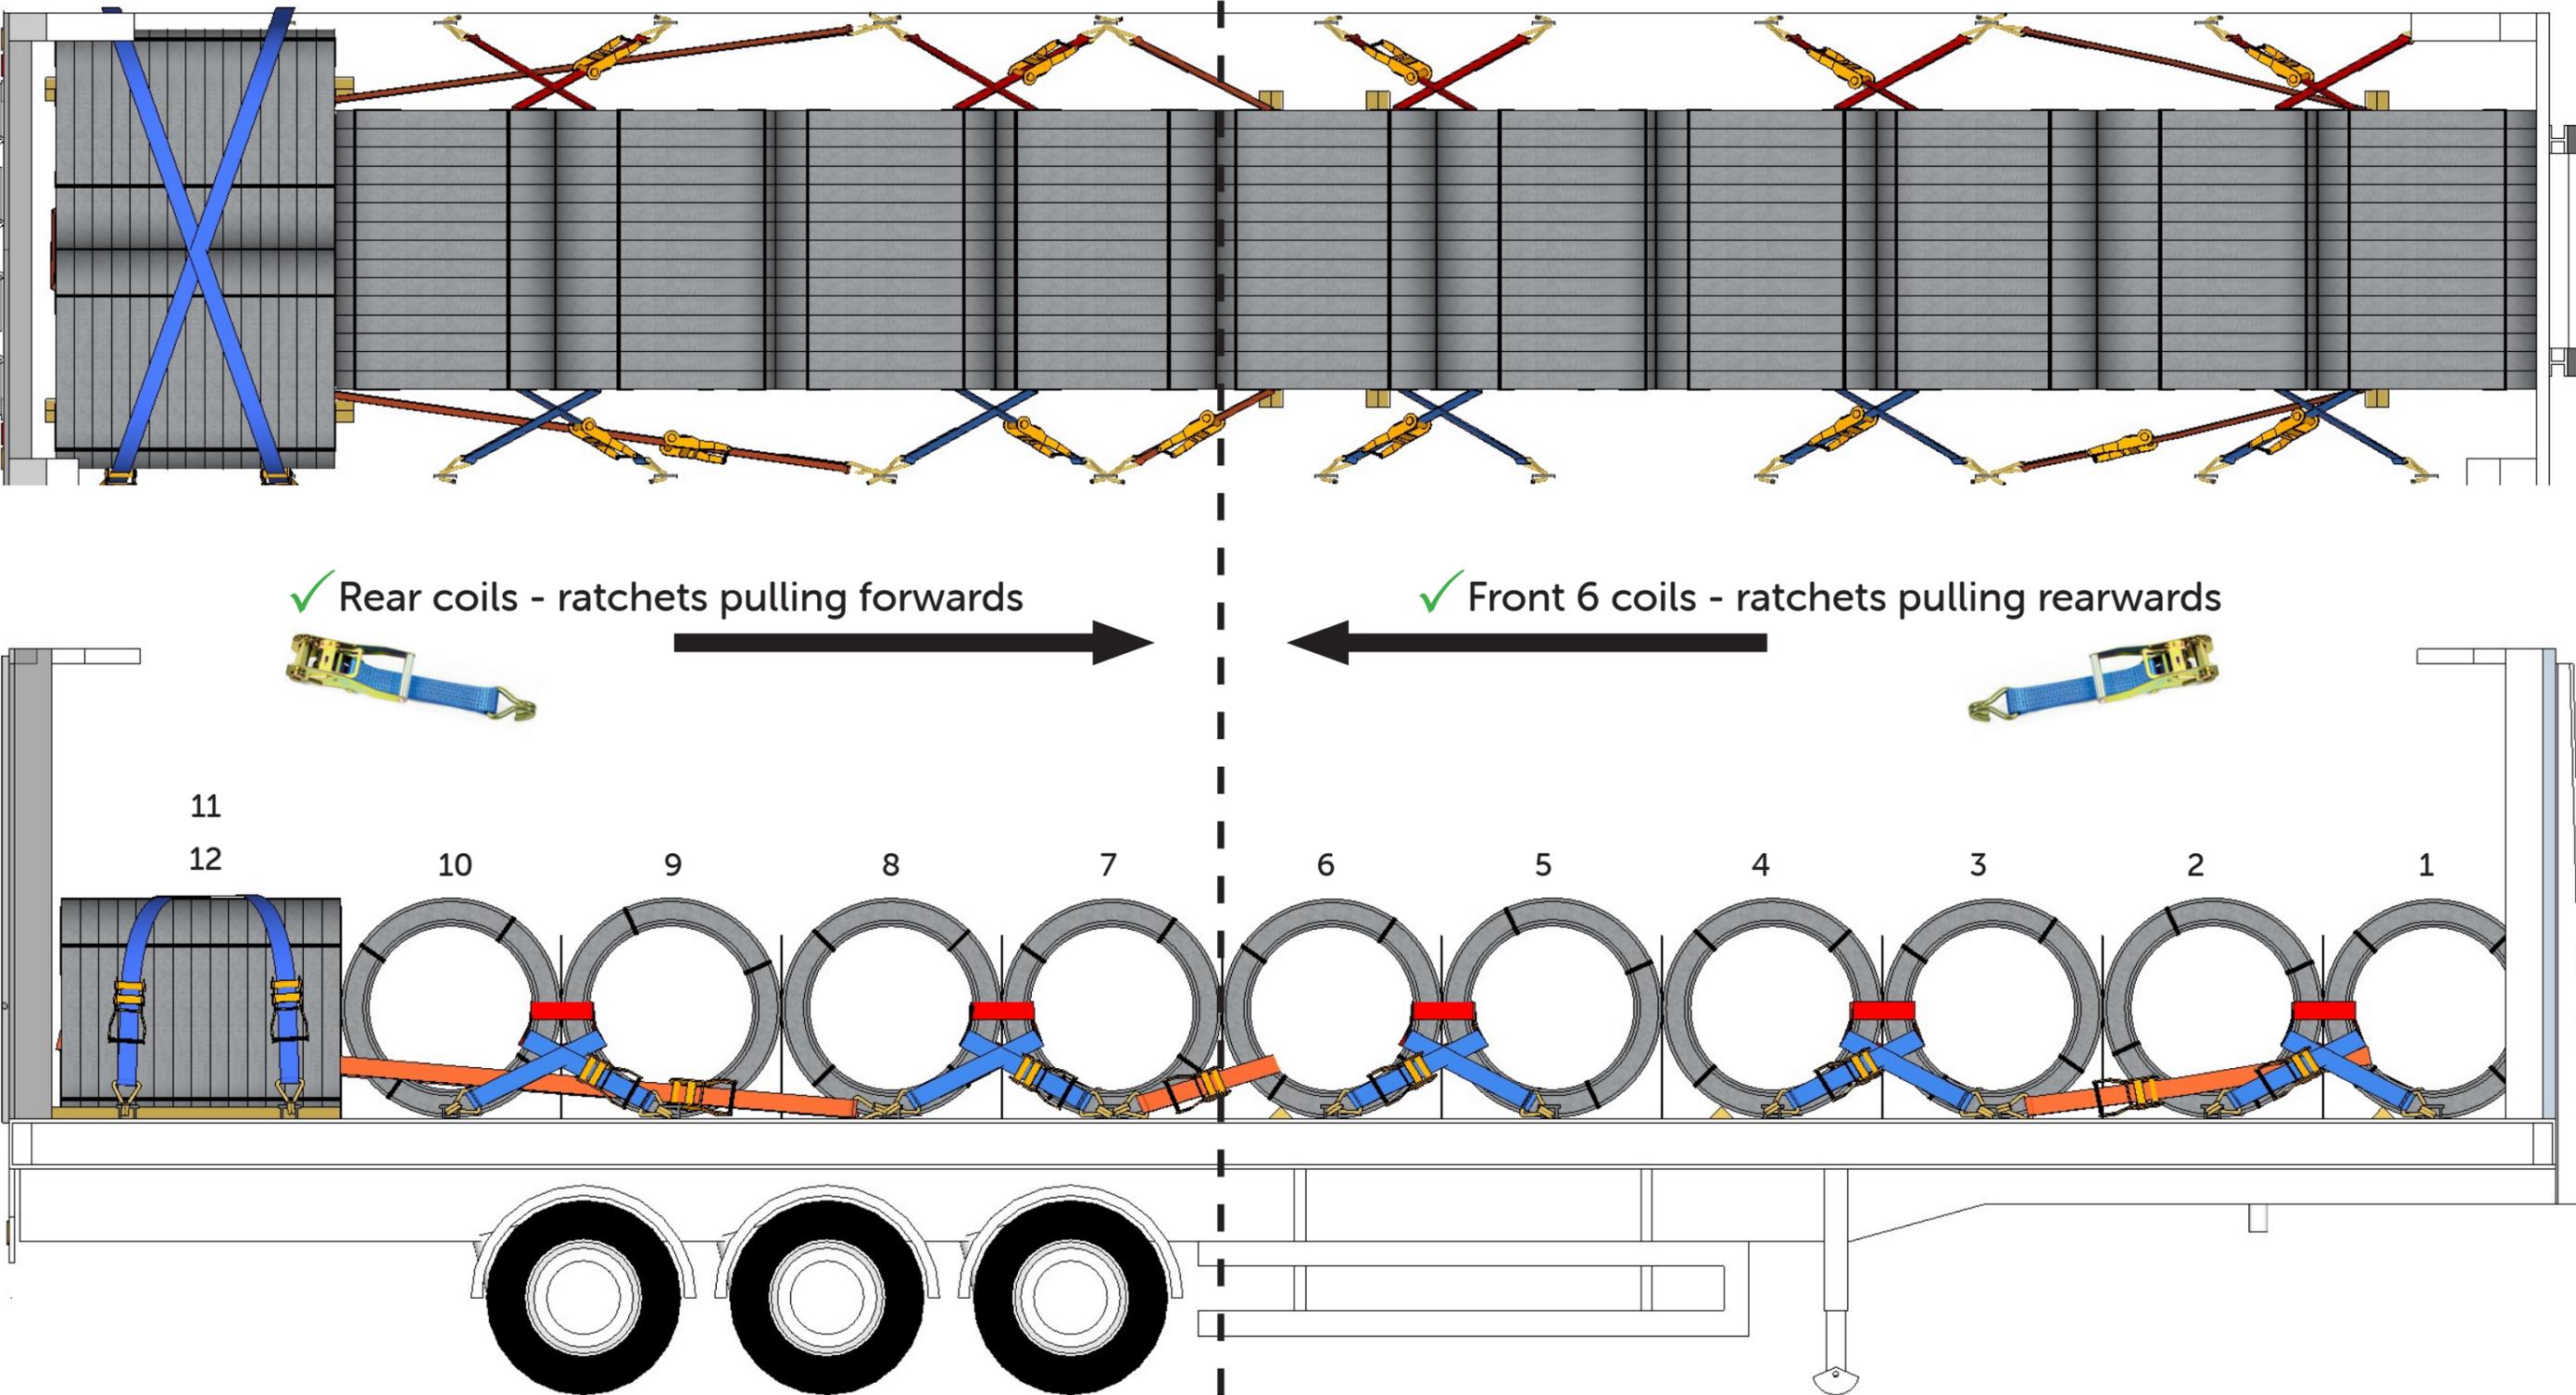

 Warning: Unchocked coils may roll whilst loading and unloading. Use temporary chocks as necessary. 

For further guidance see *LRG-0101 WRIC (Issue 1) 2023*

