




Load Restraint Requirements

- ✓ Loaded to the headboard.
- ✓ 11 x **figure of 8** straps.
- ✓ 5 x **direct restraint** straps.
- ✓ Triangular wooden chocks.

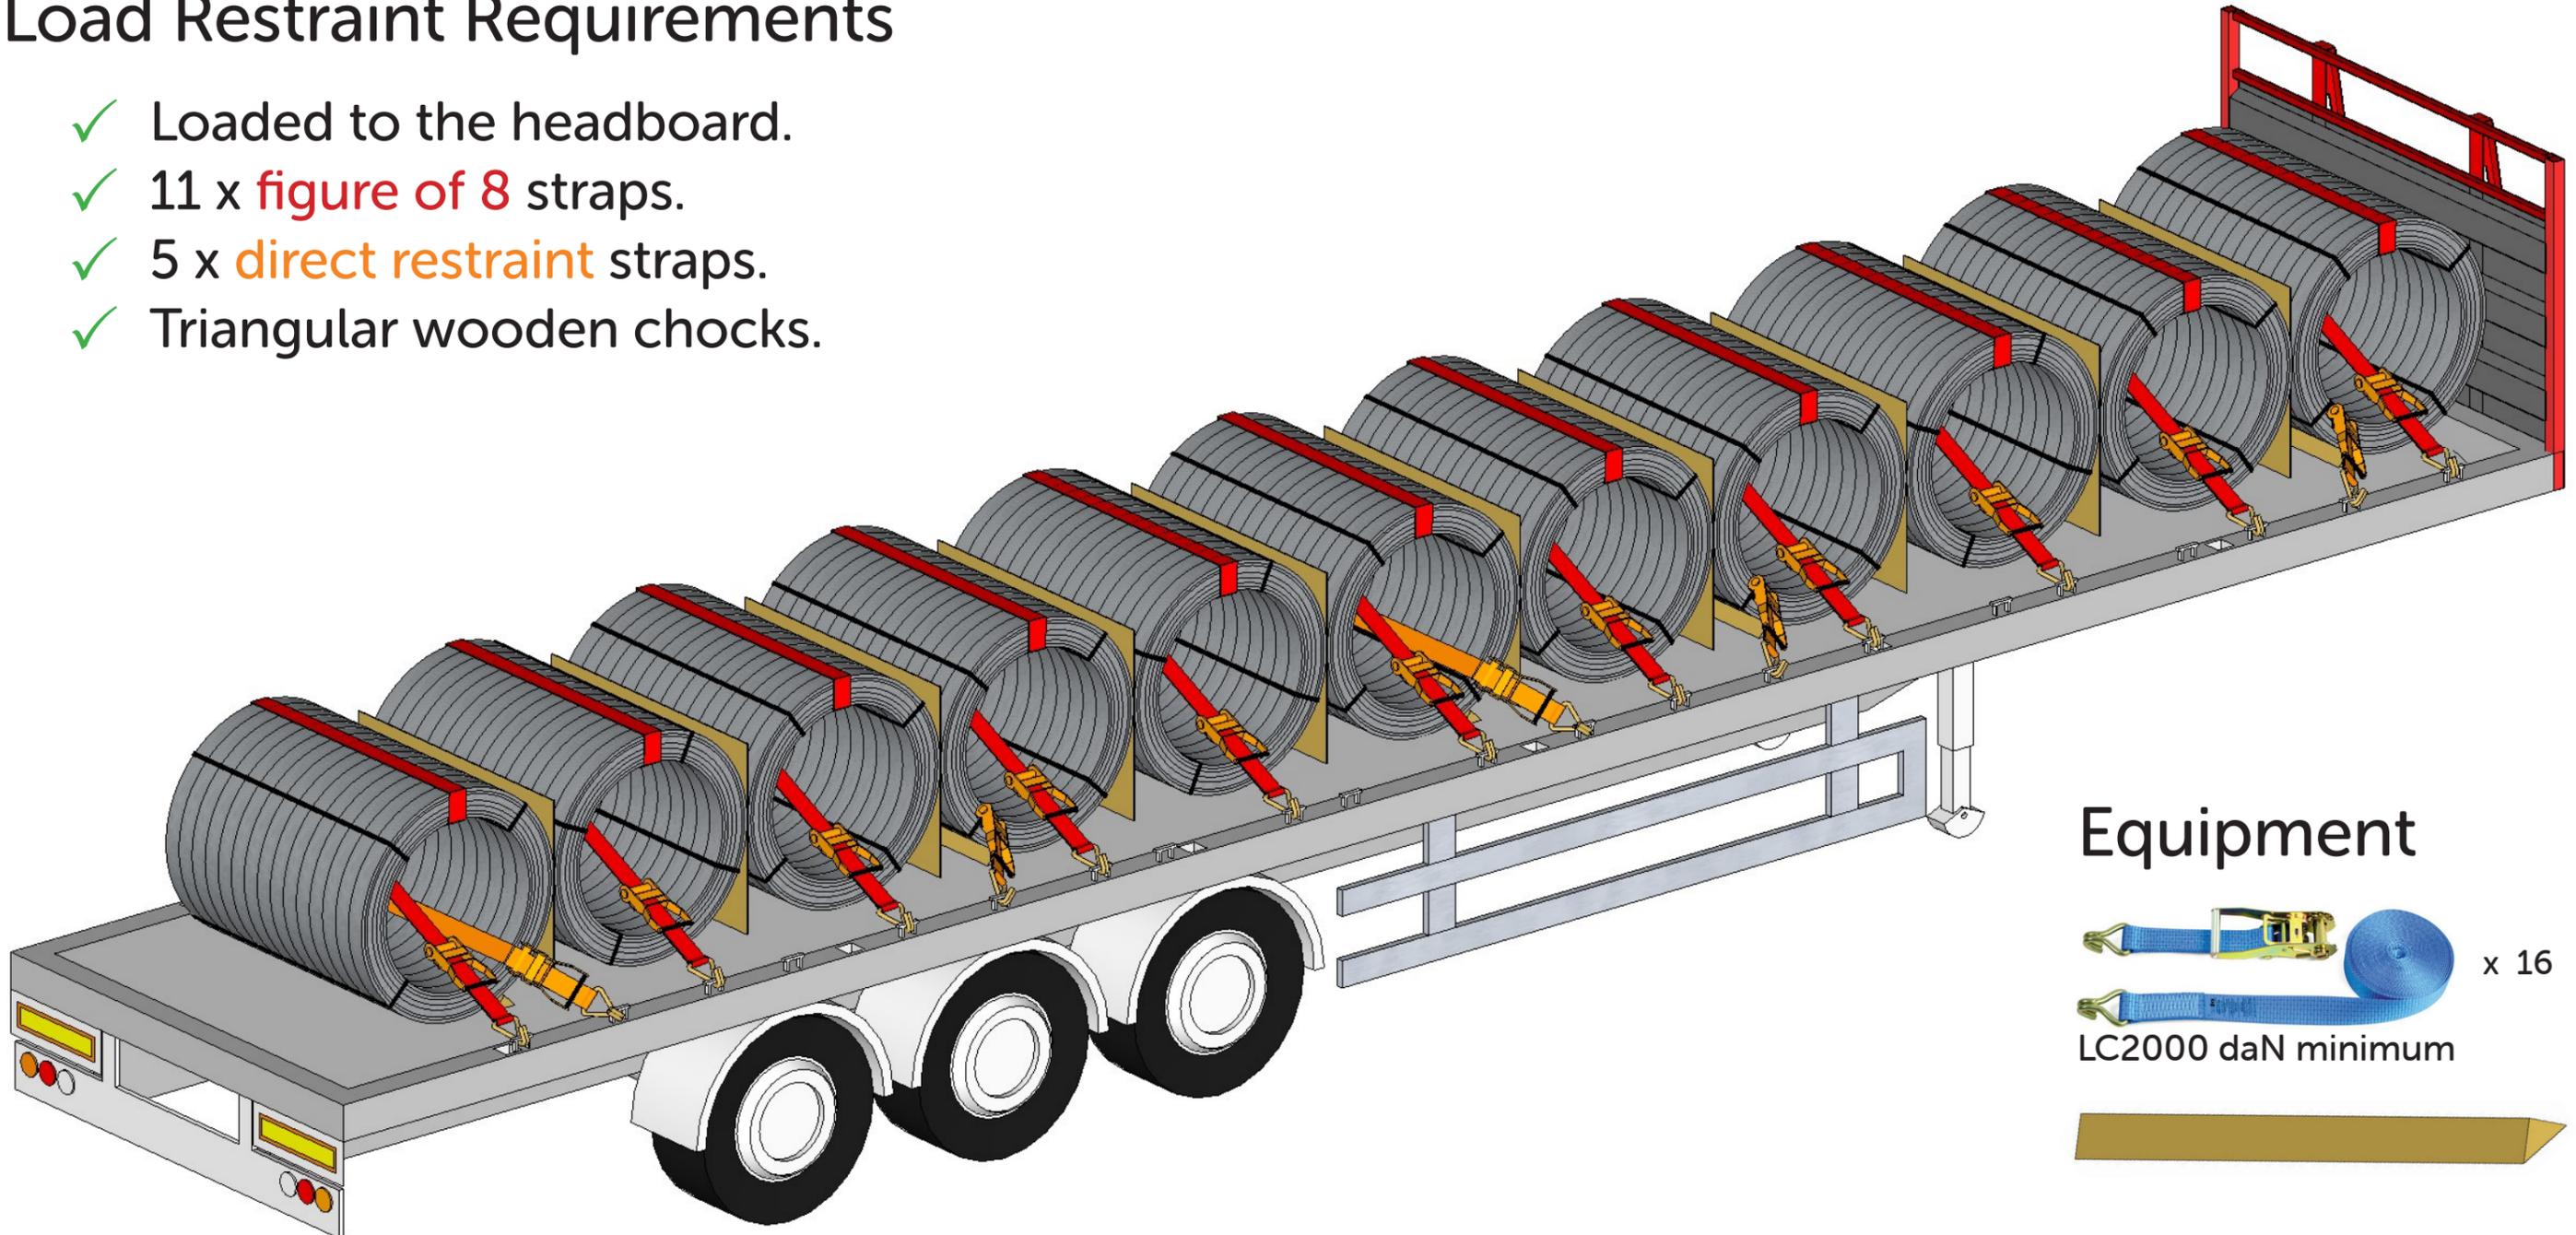


Equipment




Warning: Unchocked coils may roll whilst loading and unloading. Use temporary chocks as necessary.




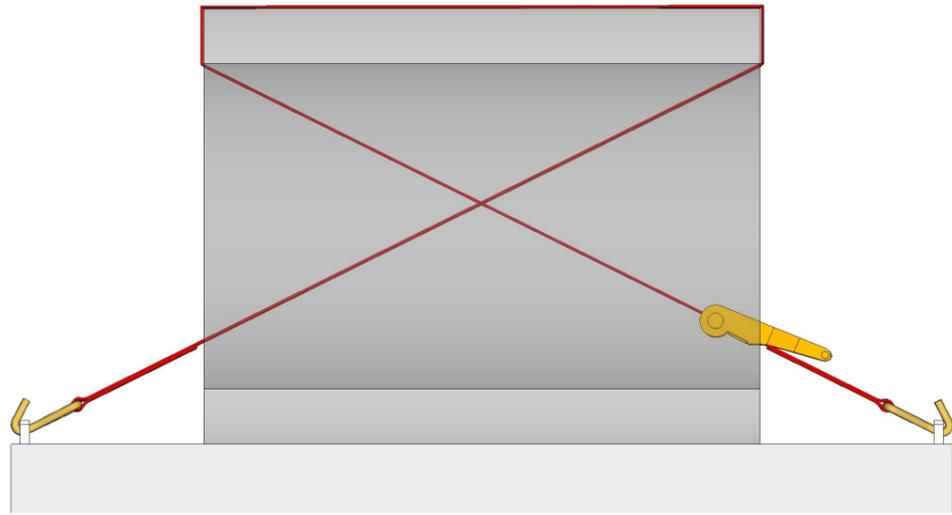


✓ 1 figure of 8 webbing strap per cross-loaded coil.

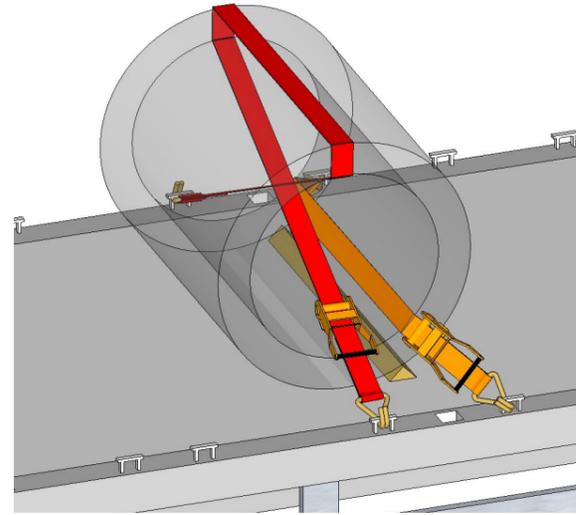

✓ Figure of 8 webbing strap with direct restraint and triangular wooden chock fitted.

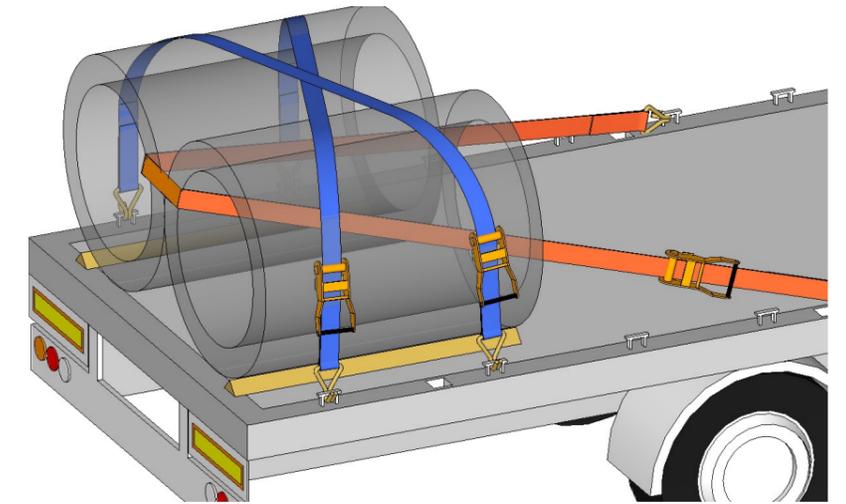

✓ Rear gun barrel coils must have a direct restraint fitted for all flatbed loads.

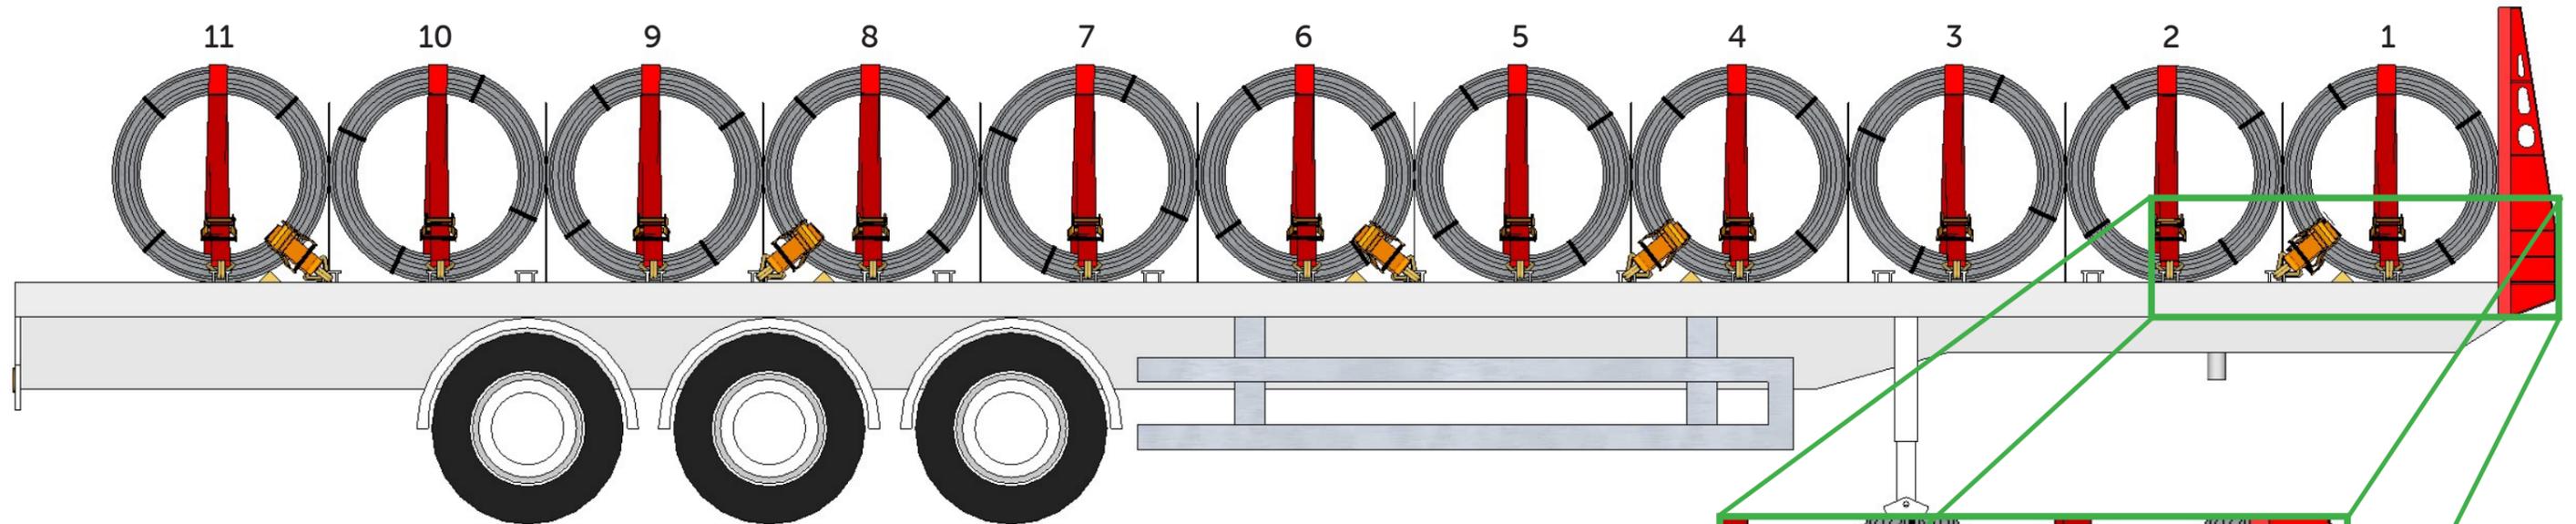

- ✓ Direct restraint pulling rearwards on coils: 1, 4 and 8.
- ✓ Direct restraint pulling forwards on coils: 6 and 11.

✓ Wooden chocks placed beneath each coil.

For further guidance see *LRG-0101 WRIC (Issue 1) 2023*

